



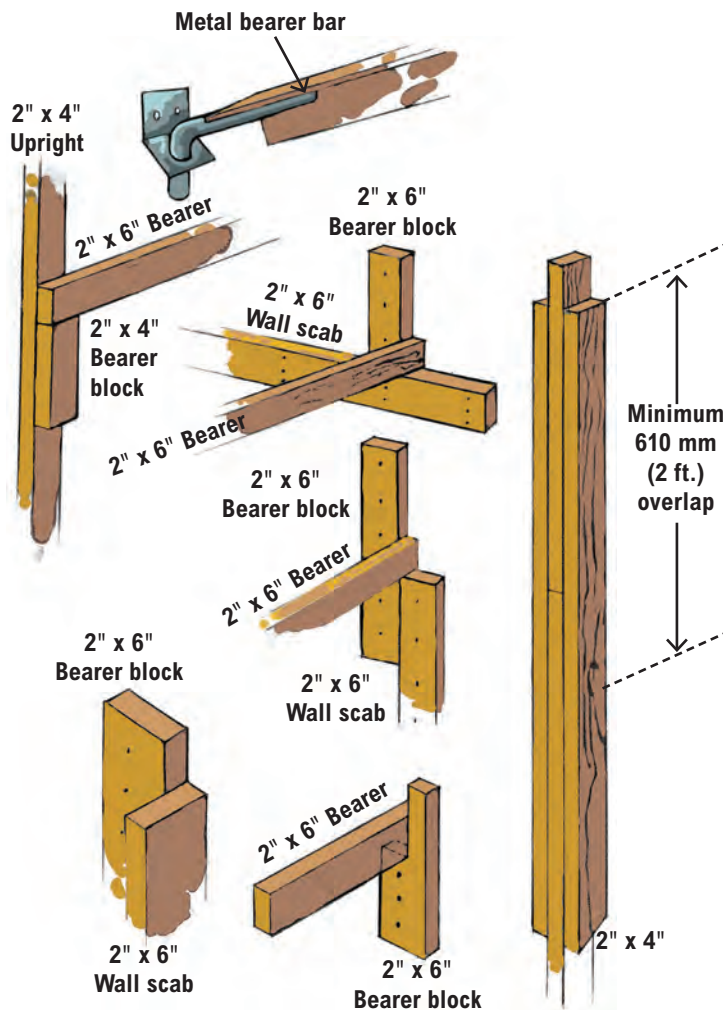

## Bearer connections at wall

### Single-pole wood scaffold for light duty

- The spacing of vertical supports and bearers of a single-pole wood scaffold for light duty must not exceed 3 m (10 ft.).
- On single-pole scaffolds, the inner ends of bearers must be
  - Supported by bearer blocks
  - Securely fastened to wall scabs

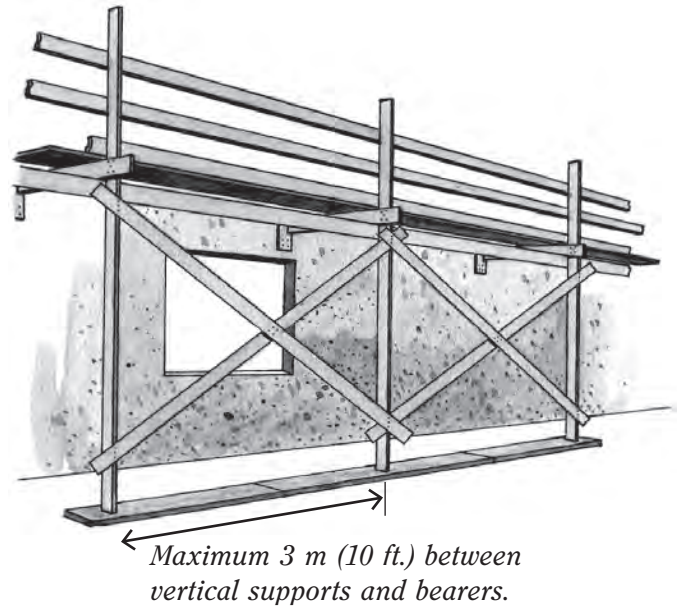

*These are examples of bearer connections.*

Project: \_\_\_\_\_ Address: \_\_\_\_\_

Employer: \_\_\_\_\_ Supervisor: \_\_\_\_\_

Date: \_\_\_\_\_ Time: \_\_\_\_\_ Shift: \_\_\_\_\_

Number in crew: \_\_\_\_\_ Number attending: \_\_\_\_\_

**Other safety issues or suggestions made by crew members:**

---

---

---

---

---

---

**Record of those attending:**

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: \_\_\_\_\_

Manager: \_\_\_\_\_ Supervisor: \_\_\_\_\_  
*(signature)* *(signature)*



WORKING TO MAKE A DIFFERENCE  
worksafebc.com